



TSM SHADOW RADIO KEY FEATURES

- Up to 16 Mbps
- Up to 16 Voice Channels
- SD and HD H.264 video encoding
- UHF, L-band, S-band in a single radio



WIDE FREQUENCY RANGE, HIGH THROUGHPUT


TrellisWare's TSM Shadow radio features unparalleled performance powered by the TSM™ waveform. The radio provides an expanded frequency range, higher throughputs for streaming multiple HD videos, and is interoperable with devices that run TSM-X™ waveform functionality. The TSM Shadow radio is redefining the edge of tactical networking.

RELIABLE IN THE HARSHTEST CONDITIONS

The TSM waveform provides the only mobile ad-hoc networking (MANET) solution with field-proven, cutting edge Barrage Relay™ technology. This innovative technology uses unique digital signal processing and cooperative combining techniques to take advantage of multipath reflections and relays in harsh RF environments to enable massive scalability and fast network adaptability.

TSM NETWORK BENEFITS

- Infrastructure-less MANET
- High-speed wireless IP networking
- Self-forming, self-healing
- Scalable to 200+ nodes
- Robust in harsh environments
- Fast, seamless network join/merge
- Instant adaptation to network topology change

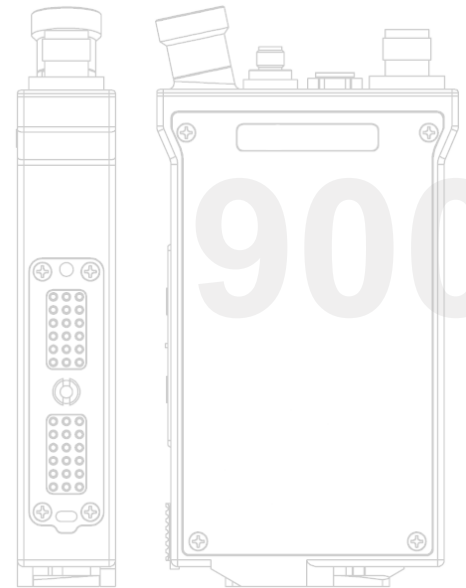

TSM SHADOW RADIO SPECIFICATIONS

Size	4.54" (H) x 2.76" (W) x 0.90" (D)
Weight (R/T only)	11.3 oz
Frequency Range	L-UHF: 225–450 MHz U-UHF: 698–970 MHz, L/S Bands: 1250–2600 MHz
Configurable Bandwidth	1.2, 4, 10, 20, 40 MHz
Transmit Power	100 mW, 250 mW, 500 mW, 1 W, 2 W
Battery Life	8 Hours with 32 Wh Rechargeable Battery
Environmental	MIL-STD-810G
Operating Temperature Range	-20C–55C
Water Resistant	IP68
Connectors	ODU Data/Audio, TNC RF, SMA GPS, 36-pin side connector
Data Rate	16 Mbps IP Throughput
Audio Encoding	AMR 5.9, MELPe, AAC Audio
Video Encoding	SD and HD H.264
Waveform	TSM Release 6
Routing	Barrage Relay™ networking

TSM NETWORKING SPECIFICATIONS

Network Coverage	<ul style="list-style-type: none"> • Mobile Ad-hoc Networking • Multi-hop – Up to 8 Hops • 200+ Nodes in a Single RF Channel • Robust in Harsh RF Environments
Communication Services	<ul style="list-style-type: none"> • Simultaneous Voice, Video, Data, PLI • Up to 16 Voice Channels • Up to 32 Voice Talk Groups • Built-in GPS • IP Support – IPv4, IPv6; Unicast, Multicast, Broadcast; TCP, UDP
Security	<ul style="list-style-type: none"> • AES-256
Application Support	<ul style="list-style-type: none"> • Built-in Web Applications • Over the Air Remote Control • APIs for 3rd Party Integration • PLI with CoT, KML, and JSON • Integration with Android™

APPLICATIONS

- Multi-cast HD video in highly dynamic, mobile operations
- Flexible bandwidth supporting a broad range of network capacities and spectrum availability worldwide
- Versatile waveform to support ground communication and ground to air communications
- Support indoor, shipboard, deep urban, tunnel and other challenging environments
- Robust RF connectivity in highly dynamic environments
- Interoperable with other TSM networking products

Contact TrellisWare today!
sales@trellisware.com
 858.753.1600

Follow us on:



Copyright © 2018 TrellisWare Technologies, Inc.
 16516 Via Esprillo, Suite 300, San Diego, CA 92127
 Tel: 858.753.1600 | info@trellisware.com | www.trellisware.com